



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FORM <i>(to be used for all correspondence after initial filing)</i>	Application Number	10/604,478	
	Filing Date	7/24/03	
	First Named Inventor	Bertrand Gabillard, et al.	
	Art Unit	not assigned	
	Examiner Name	not assigned	
Total Number of Pages in This Submission		Attorney Docket Number	FR920020053US1

ENCLOSURES (check all that apply)		
<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> After Allowance communication to Group
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment / Reply	<input type="checkbox"/> Petition	<input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition to Convert a Provisional Application	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Terminal Disclaimer	<input type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Request for Refund	
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> CD, Number of CD(s) _____	
<input checked="" type="checkbox"/> Certified Copy of Priority Document(s)	Remarks	
<input type="checkbox"/> Response to Missing Parts/ Incomplete Application		
<input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53		

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual name	Lisa J. Ulrich, Reg. No. 45,168
Signature	<i>Lisa J. Ulrich</i>
Date	9/2/04

CERTIFICATE OF TRANSMISSION/MAILING			
I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the			
Typed or printed name	Nicole Barrese		
Signature	<i>Nicole Barrese</i>	Date	9-2-04

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.



THIS PAGE BLANK (USE)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02368082.0

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 02368082.0
Demande no:

Anmeldetag:
Date of filing: 26.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

INTERNATIONAL BUSINESS MACHINES CORPORATION

Armonk, NY 10504
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Improved 2-stage large bandwidth amplifier using diodes in the parallel feedback structure

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H03F3/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

THIS PAGE BLANK (USPTO)

IMPROVED 2-STAGE LARGE BANDWIDTH AMPLIFIER USING DIODES IN THE PARALLEL FEEDBACK STRUCTURE

5

FIELD OF THE INVENTION

The present invention relates to high speed transmission systems and more particularly to an improved 2-stage large bandwidth amplifier with diodes in the parallel feedback structure.

10

BACKGROUND OF THE INVENTION

In high speed transmission systems such as those involved in the forthcoming 10 Gb/s Ethernet, the signal after transmission along a media is largely attenuated and needs to be amplified before any operation is performed in the receiving section (A/D conversion, clock synchronization, data serialization, ... etc.).

15 The amplification circuits of these systems must work at the highest possible speed because bits are serialized in the emitting section before they are sent on a single transmission channel. As a result, bandwidth and gain constraints are imposed to the amplification circuits on the receiving side of these high speed transmission systems.

20 Conventional amplification solutions are based on bipolar devices that are superior to MOSFET devices because of their higher F_t (transition frequency). The traditional tradeoff between gain and bandwidth usually requires multiple cascaded stages of amplifying bipolar transistors mounted in common emitter and connected in series with a resistive load on the collector of the output transistor. A known
25 refinement is to place a parallel feedback structure from one stage to the preceding one, as shown in FIG. 1.

Now turning to FIG. 1, there is shown such a conventional amplifier referenced 10 that is comprised of two stages simply formed by two bipolar transistors Q1 and Q2 for the sake of simplicity that are connected in series. The

collector of transistor Q1 is connected to the base of transistor Q2. The input signal V_{in} is applied to the base of input transistor Q1 via input terminal 11, while the output signal V_{out} is available at output terminal 12 connected to the collector of the output transistor Q2. The parallel feedback structure 13 consists of a voltage divider comprised of resistors R1 and R2 and a bipolar transistor Q3, referred to as the feedback transistor, configured in emitter follower, that is connected in series with a load resistor Rf. Feedback transistor Q3 injects the feedback signal V_f through said resistor Rf at node 14 to the connecting node of transistors Q1 and Q2, that is referenced 15. The voltage at this node 15 is referenced V_c . In normal operation, when the feedback structure is implemented, nodes 14 and 15 are merged and voltages V_f and V_c are identical, this distinction is only worth when the feedback structure 13 is made inoperative, e.g. by cutting the wire between nodes 14 and 15 (as it will be explained later on in due course). Amplifier 10 is biased between a positive voltage Vcc and the ground Gnd. A similar circuit is described in the article "High-Bit-rate, High-Input-Sensitivity Decision Circuit Using Si Bipolar Technology" by K.Ishii et al, IEEE Journal of Solid-State Circuits, vol 29, No 5, May 1994.

This parallel feedback structure is useful because it reduces the collector-base capacitance of input transistor Q1, which is the cause of the bandwidth roll-off at high frequencies. Nevertheless, the overall bandwidth of amplifier 10 is still limited by the second stage, i.e. Output transistor Q2, because the collector capacitance of transistor Q2 remains large. Moreover, the gain of transistor Q2 is strongly related to the value of resistors R1 and R2 and to its transconductance which vary independently of one another. Finally, amplifier 10 is often unstable, because the gain of feedback structure 13 is quite often greater than 1.

SUMMARY OF THE INVENTION

It is therefore a primary object of the present invention to provide an improved 2-stage large bandwidth amplifier with diodes in the parallel feedback structure that significantly extends the output transistor Q2 bandwidth, and thus the overall amplifier bandwidth.

It is another object of the present invention to provide an improved 2-stage large bandwidth amplifier with diodes in the parallel feedback structure wherein the

gain of the output transistor Q2 is better controlled, and thus the overall amplifier gain.

It is another object of the present invention to provide an improved 2-stage large bandwidth amplifier with diodes in the parallel feedback structure wherein the gain of the feedback loop is adjusted to be lower than 1 for greater stability.

According to the present invention there is described an improved 2-stage large bandwidth amplifier with diodes in the parallel feedback structure comprising:

two amplification stages formed by first and second bipolar transistors configured in common emitter that are connected in series so that the collector of the first transistor and the base of the second transistor form a connecting node and with their emitters tied to a first supply voltage;

an input terminal receiving the input signal connected to the base of said first transistor;

an output terminal connected to the collector of said second transistor where the output signal is available;

a parallel feedback structure consisting in one branch of two diodes connected in series between the collector of said second bipolar transistor and a second supply voltage and in another branch, of a third bipolar transistor, configured in emitter follower with a load resistor in series with the emitter, the collector of which is connected to the second supply voltage and the base is connected to the common node of said diodes, said third bipolar transistor injects the feedback signal at said connecting node of said first and second bipolar transistors.

The novel features believed to be characteristic of this invention are set forth in the appended claims. The invention itself, however, as well as other objects and advantages thereof, may be best understood by reference to the following detailed description of an illustrated preferred embodiment to be read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a conventional large bandwidth two-stage amplifier with a parallel feedback structure including a voltage divider made of two resistors.

FIG. 2 shows the amplifier of FIG. 1 improved according to the present invention to implement two diodes in the parallel feedback structure.

FIG. 3 shows the gain versus the frequency response curves of both the conventional and improved amplifiers.

DESCRIPTION OF A PREFERRED EMBODIMENT

According to the teachings of the present invention, the amplifier shown in FIG. 1 is improved by reducing the collector capacitance of the output transistor Q2 and getting substantially identical bandwidth for each stage. Now turning to FIG. 2, where the improved amplifier circuit is referenced 20, these objectives are met by replacing the two resistors R1 and R2 by two diode-connected bipolar devices labeled D1 and D2, which can be identical devices. Surprisingly, these diodes D1 and D2 which are not linear elements, perform better than resistors that are perfectly linear. The lower resistance that is presented by the two diodes D1 and D2 also reveals to be a valuable contribution to the expected results. This construction minimizes the capacitance loading on the collector of transistor Q2 and improves the bandwidth of the second stage. The common node between the two diodes is used as the intermediate tap of the resistor divider to still bias transistor Q3 base. But, the feedback ratio is now set by the transconductance ratio (g_m) of the diodes. The usual value of g_m for standard diodes is in the 25 Ohm^{-1} range for a 1mA bias. The “dynamic resistance”, equal to $1/g_m$, is thus lower than the resistance value that is used to correctly bias the feedback transistor Q3 in conventional amplifier 10, which is rather in the 50 to 200 Ohms range.

Let us assume that amplification transistors Q1 and Q2 and feedback devices Q3 and R_f are identical, and the dimensions of devices R1/R2 and D1/D2 are tuned to obtain the maximum bandwidth in either case. Curves 31 and 32 shown in FIG. 3, illustrate the frequency response of amplifiers 10 and 20 respectively. The improved amplifier 20 thus significantly extends the bandwidth of the conventional amplifier 10 above the 20 GHz range, i.e. by a factor of at least two, in the same operating conditions. In addition, as apparent in FIG. 3, at 20 GHz, the improvement in terms of gain is greater than 10 dB. Assuming $R1=R2=R$ and $D1=D2=D$, Table 1 below gives simulation results for the two amplifiers, allowing a comparison between their respective performance.

Table 1

	Unit	Conventional	Improved
Gain 1 st stage	dB	6.84	10.95
Gain 2 nd stage	dB	13.17	5.57
Total Gain	dB	19.65	16.52
Bandwidth 1 st stage	GHz	36.27	25.61
Bandwidth 2 nd stage	GHz	2.69	23.89
Total Bandwidth	GHz	10.22	21.96

As apparent in Table 1, the improved amplifier 20 has a significantly higher bandwidth (at the cost of a small reduction of the gain) demonstrating thereby the merits of the proposed solution. Note that, with other dimension adjustments, a higher gain with similar bandwidth could be obtained as well. The second stage which benefits from the diode loading on the collector of output transistor Q2 has a bandwidth about 10 times larger than with a resistive load. Applicants' inventors have also noticed another advantages of the improved amplifier 20, not identifiable from Table 1 and in FIG. 3. The gain peaking in the first stage is twice larger with the conventional amplifier than with the improved amplifier (8 dB at 8 GHz vs 1 dB at 16 GHz).

Moreover, the gain of the second stage is defined by the $gm_{Q2} \times (R1 + R2)$ product in the conventional solution, where gm_{Q2} is the transconductance of transistor Q2. In the proposed circuit, the gain becomes $gm_{Q2} \times (gm_{D1}^{-1} + gm_{D2}^{-1})$, where gm_{D1} and gm_{D2} are the transconductance of diodes D1 and D2 that is approximately equal to 2. Typically, diodes D1 and D2, are identical devices and are made of a bipolar transistor having the same dimensions that transistor Q2, the base-collector junction of which being short-circuited, to match transistor Q2. As a result, there is less variations across a full process range than with the conventional design of amplifier 10 because of the natural matching of identical components. Table 2 below shows a comparison between the conventional and improved amplifiers in terms of statistical performance.

Table 2

	Conventional			Improved		
	Mean	Sigma	Min-Max	Mean	sigma	Min-Max
Gain [dB]	19.5	0.81	16.0-20.6	16.5	0.48	13.7-17.2
Bandwidth [GHz]	9.95	1.78	4.2-13.0	21.9	1.12	18.6-25.3

The process and mismatch variations give lower standard deviations of the gain and of the bandwidth because of the good component matching mentioned above that control the variation of the gain of the second stage of improved amplifier 20. As apparent from Table 2, the standard deviations (sigma) in terms of gain and bandwidth are reduced by approximately 40%. This considerably helps to improve the manufacturing yield.

The stability of both circuits 10 and 20 can be analyzed by comparing the feedback signal V_f to signal V_c on the collector of Q1 and compute the value of the feedback loop gain V_f/V_c . To that end, the feedback loop between nodes 14 and 15 is broken. This can be expressed as: $V_f/V_c=(V_f/V_m)\times(V_m/V_{out})\times(V_{out}/V_c)$, where V_m is the voltage at the common node (tap) of the two resistors (FIG. 1) or the two diodes (FIG. 2) and V_{out} the output signal at collector of transistor Q2. The V_f/V_m ratio is approximately equal to 0.9 for an typical emitter follower stage. The V_m/V_{out} ratio equals $R1/(R1+R2)$ for circuit 10 and is equal to $gmD1^{-1}/(gmD1^{-1}+gmD2^{-1})$ for circuit 20, while the V_{out}/V_c ratio is equal to $gmQ2\times(R1+R2)$ and $gmQ2\times(gmD1^{-1}+gmD2^{-1})$ respectively.

After simplification, the V_f/V_{out} ratio gives a value of $0.9\times gmQ2\times R1$ for the conventional circuit 10 and 0.9 for the improved circuit 20 of the present invention. The first expression can lead to values superior to 1 and thus can cause instability during the design phase but also during manufacturing where variations of process can increase the value of $gmQ2$ or $R1$. The improved circuit 20 is never unstable since the loop gain is always smaller than 1.

While the invention has been particularly described with respect to a preferred embodiment thereof it should be understood by one skilled in the art that the foregoing and other changes in form and details may be made therein without departing from the spirit and scope of the invention.

CLAIMS

What is claimed is:

1. An improved 2-stage large bandwidth amplifier (20) comprising:
 - two amplification stages formed by first and second bipolar transistors (Q1,Q2)
 - 5 configured in common emitter that are connected in series so that the collector of the first transistor and the base of the second transistor form a connecting node and with their emitters tied to a first supply voltage (Gnd);
 - an input terminal (11) receiving the input signal (V_{in}) connected to the base of said first transistor;
 - 10 an output terminal (12) connected to the collector of said second transistor where the output signal (V_{out}) is available;
 - a parallel feedback structure (13') consisting in one branch of two diodes (D1,D2) connected in series between the collector of said second bipolar transistor and a second supply voltage (V_{cc}) and in another branch, of a third bipolar transistor (Q3),
 - 15 configured in emitter follower with a load resistor (R_f) in series with the emitter, the collector of which is connected to the second supply voltage and the base is connected to the common node of said diodes, said third bipolar transistor injects the feedback signal (V_f) at said connecting node (15) of said first and second bipolar transistors.
- 20 2. The improved 2-stage large bandwidth amplifier of claim 1 wherein each diode is constructed with a bipolar transistor substantially identical to said second transistor, the collector-base junction of which is shorted for matching therewith.

THIS PAGE BLANK (USPTO)

IMPROVED 2-STAGE LARGE BANDWIDTH AMPLIFIER USING DIODES IN THE PARALLEL FEEDBACK STRUCTURE

ABSTRACT

5 There is disclosed an improved 2-stage large bandwidth amplifier (20) comprised of two stages formed by first and second bipolar transistors (Q1,Q2) configured in common emitter that are connected in series with their emitters connected to a first supply voltage (Gnd). The input signal (V_{in}) is applied to the base of said first transistor via an input terminal (11), while the output signal (V_{out}) is available at an
10 output terminal (12) connected to the collector of said second transistor. A parallel feedback structure (13') is provided. It consists, in a first branch, of two diodes (D1,D2) in series connected between a second supply voltage (V_{cc}) and the collector of the second bipolar transistor, and in another branch of a third bipolar transistor (Q3) configured in emitter follower with a resistor (R_f) in the emitter. The
15 base and the collector of said third bipolar transistor are respectively connected to the common node of said diodes and to said second supply voltage. The resistor is connected to the common node of said first and second transistors to inject the feedback signal (V_f). Because, the two diodes have a low internal resistance and reduce the collector capacitance of the second transistor, the overall bandwidth of
20 the improved amplifier is significantly extended in the very high frequencies (e.g. 20 GHz and above).

FIG. 2

THIS PAGE BLANK (USPTO)

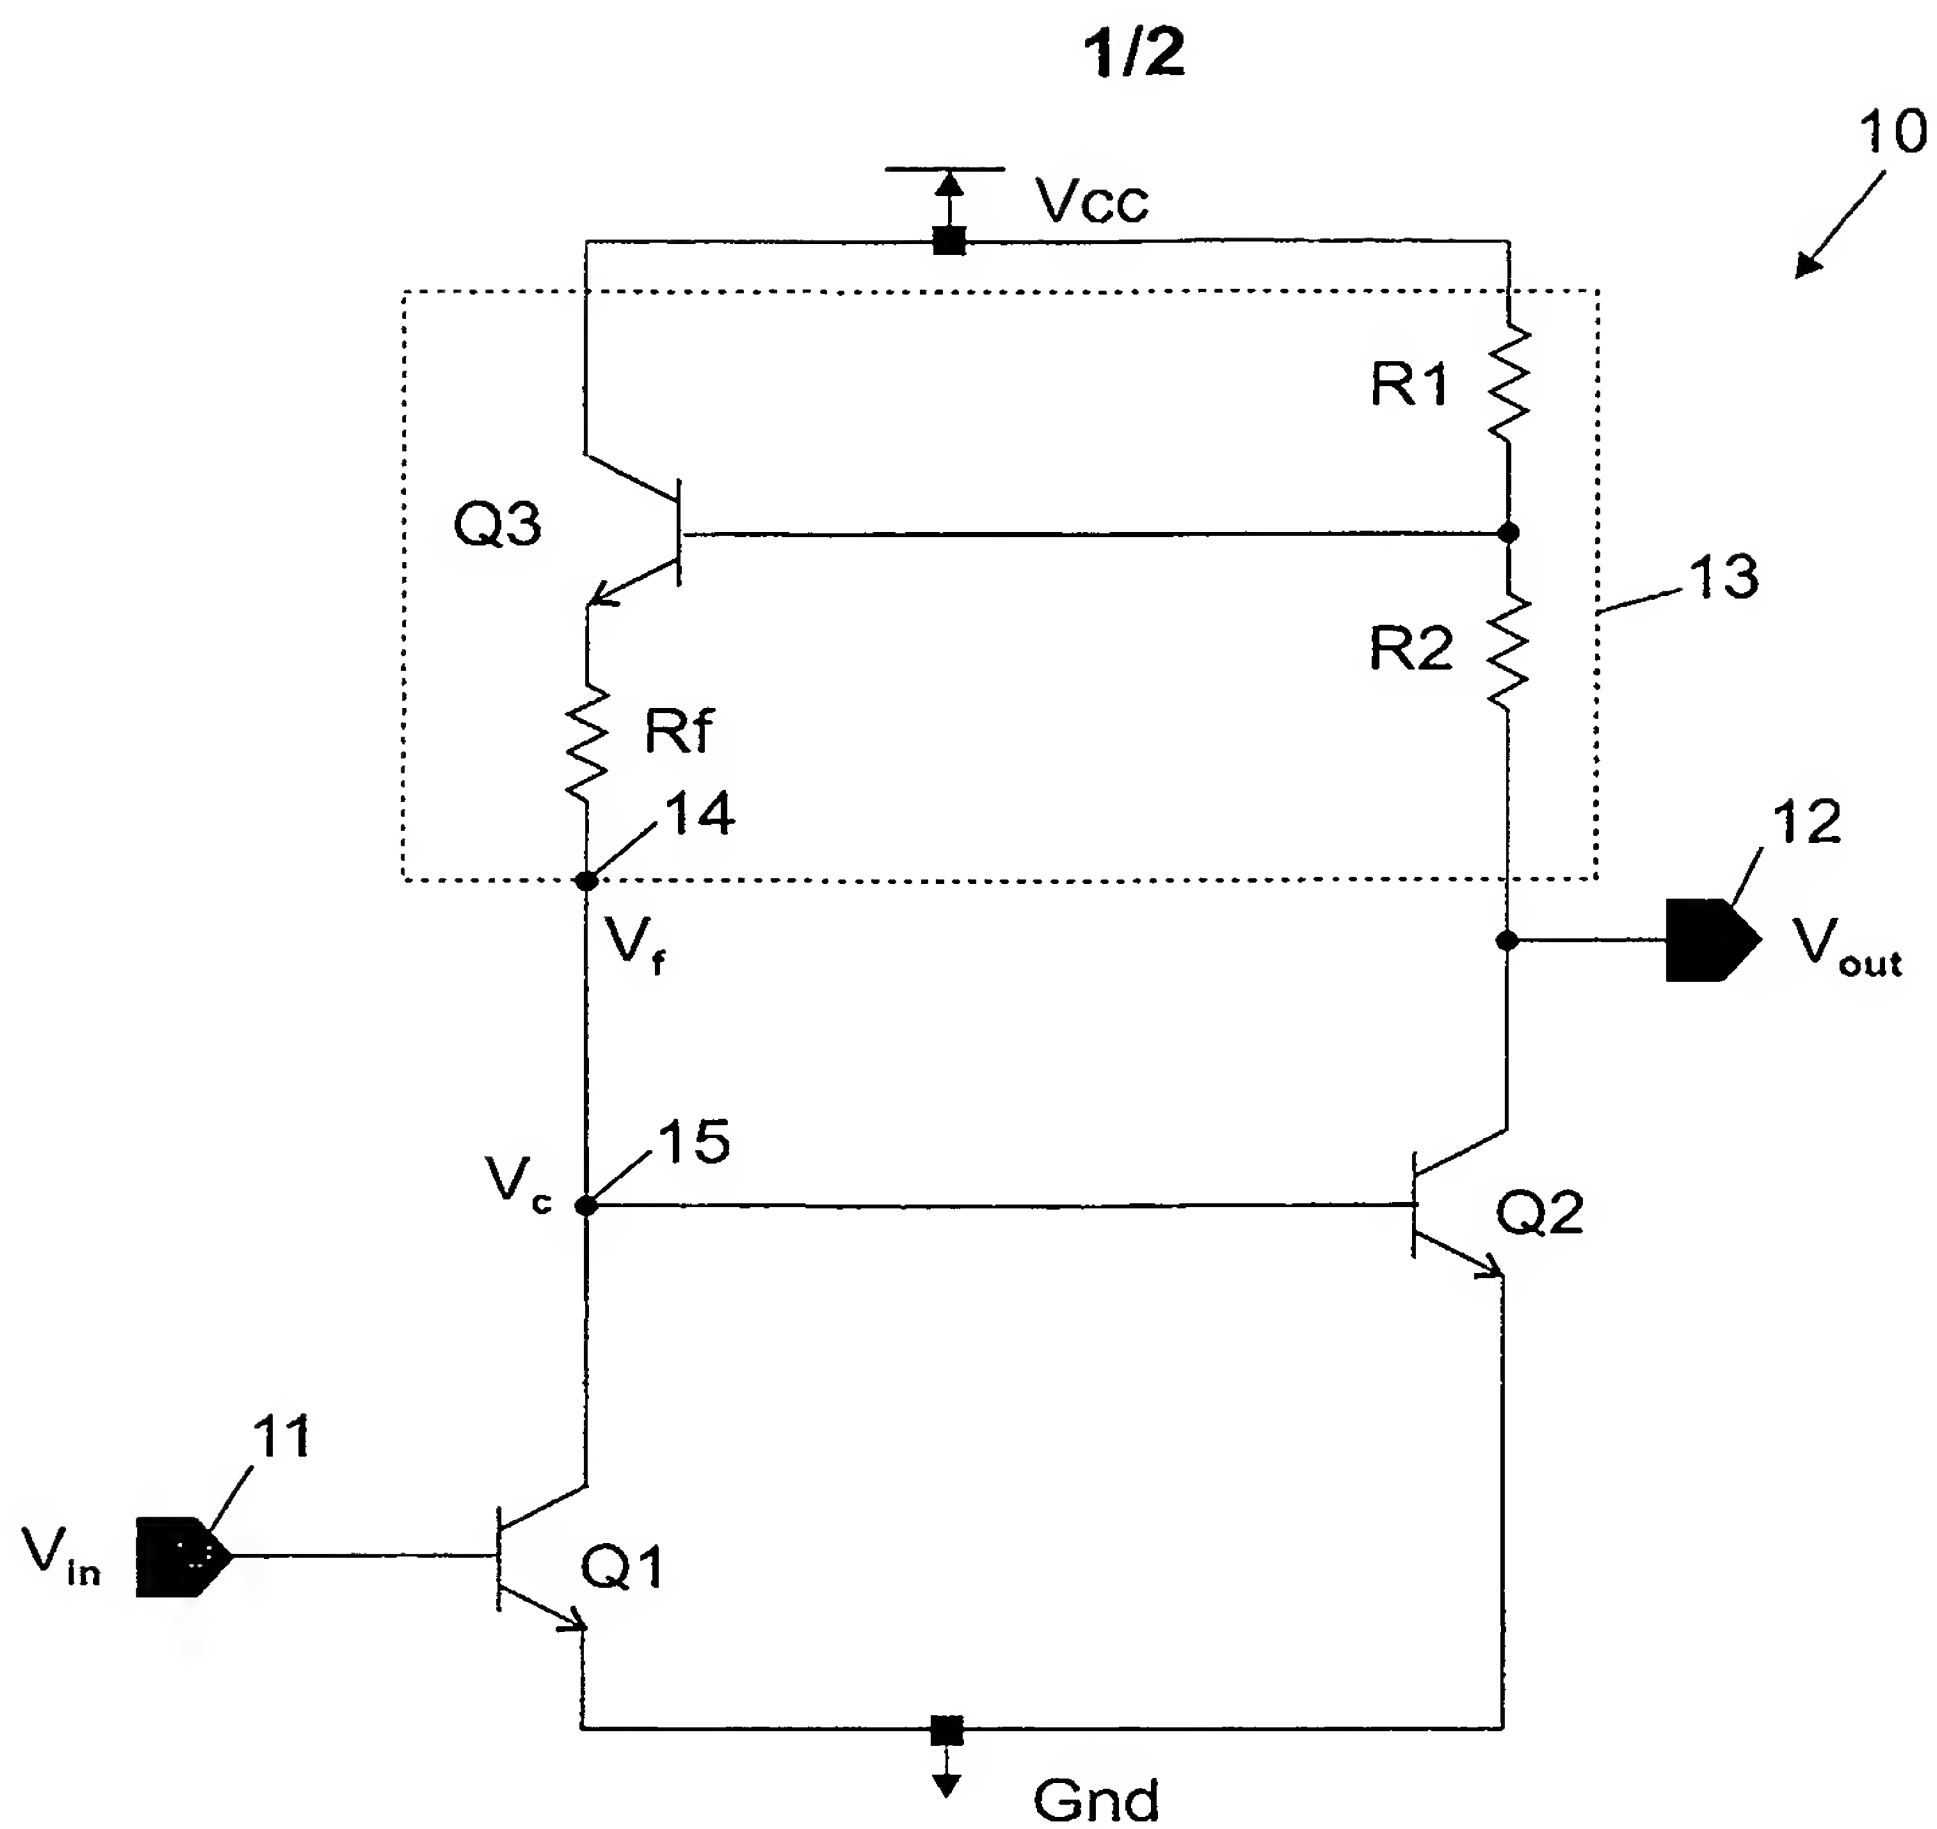


FIG. 1 (Prior Art)

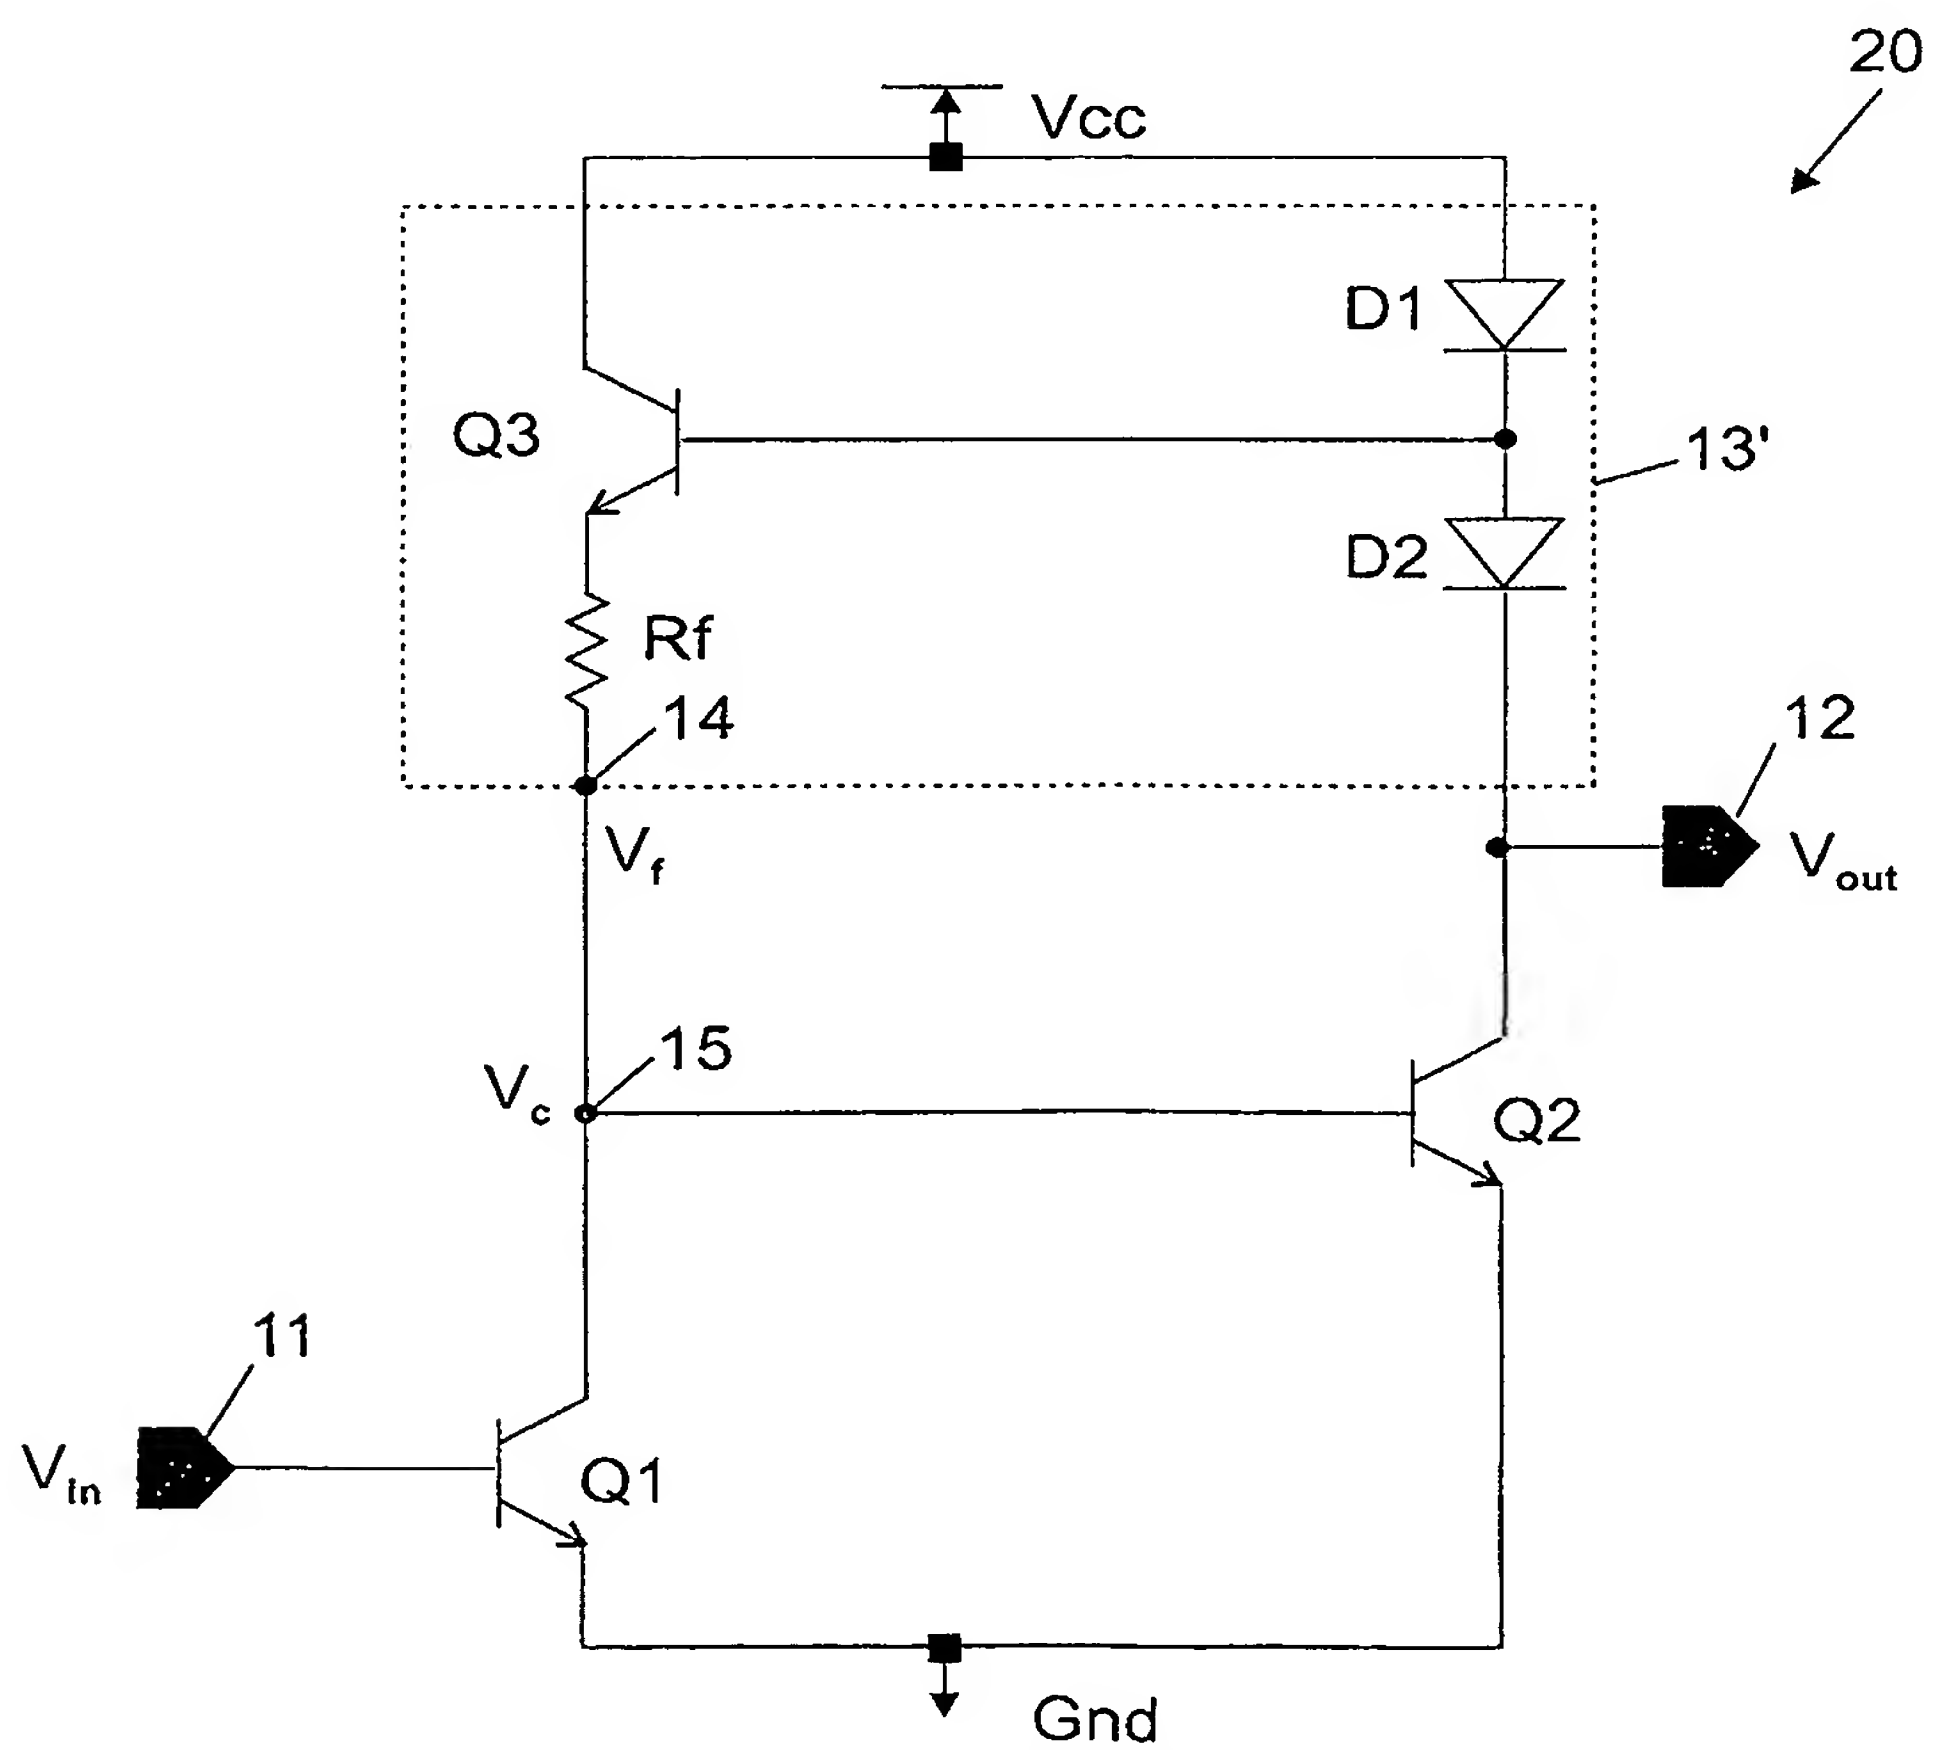


FIG. 2

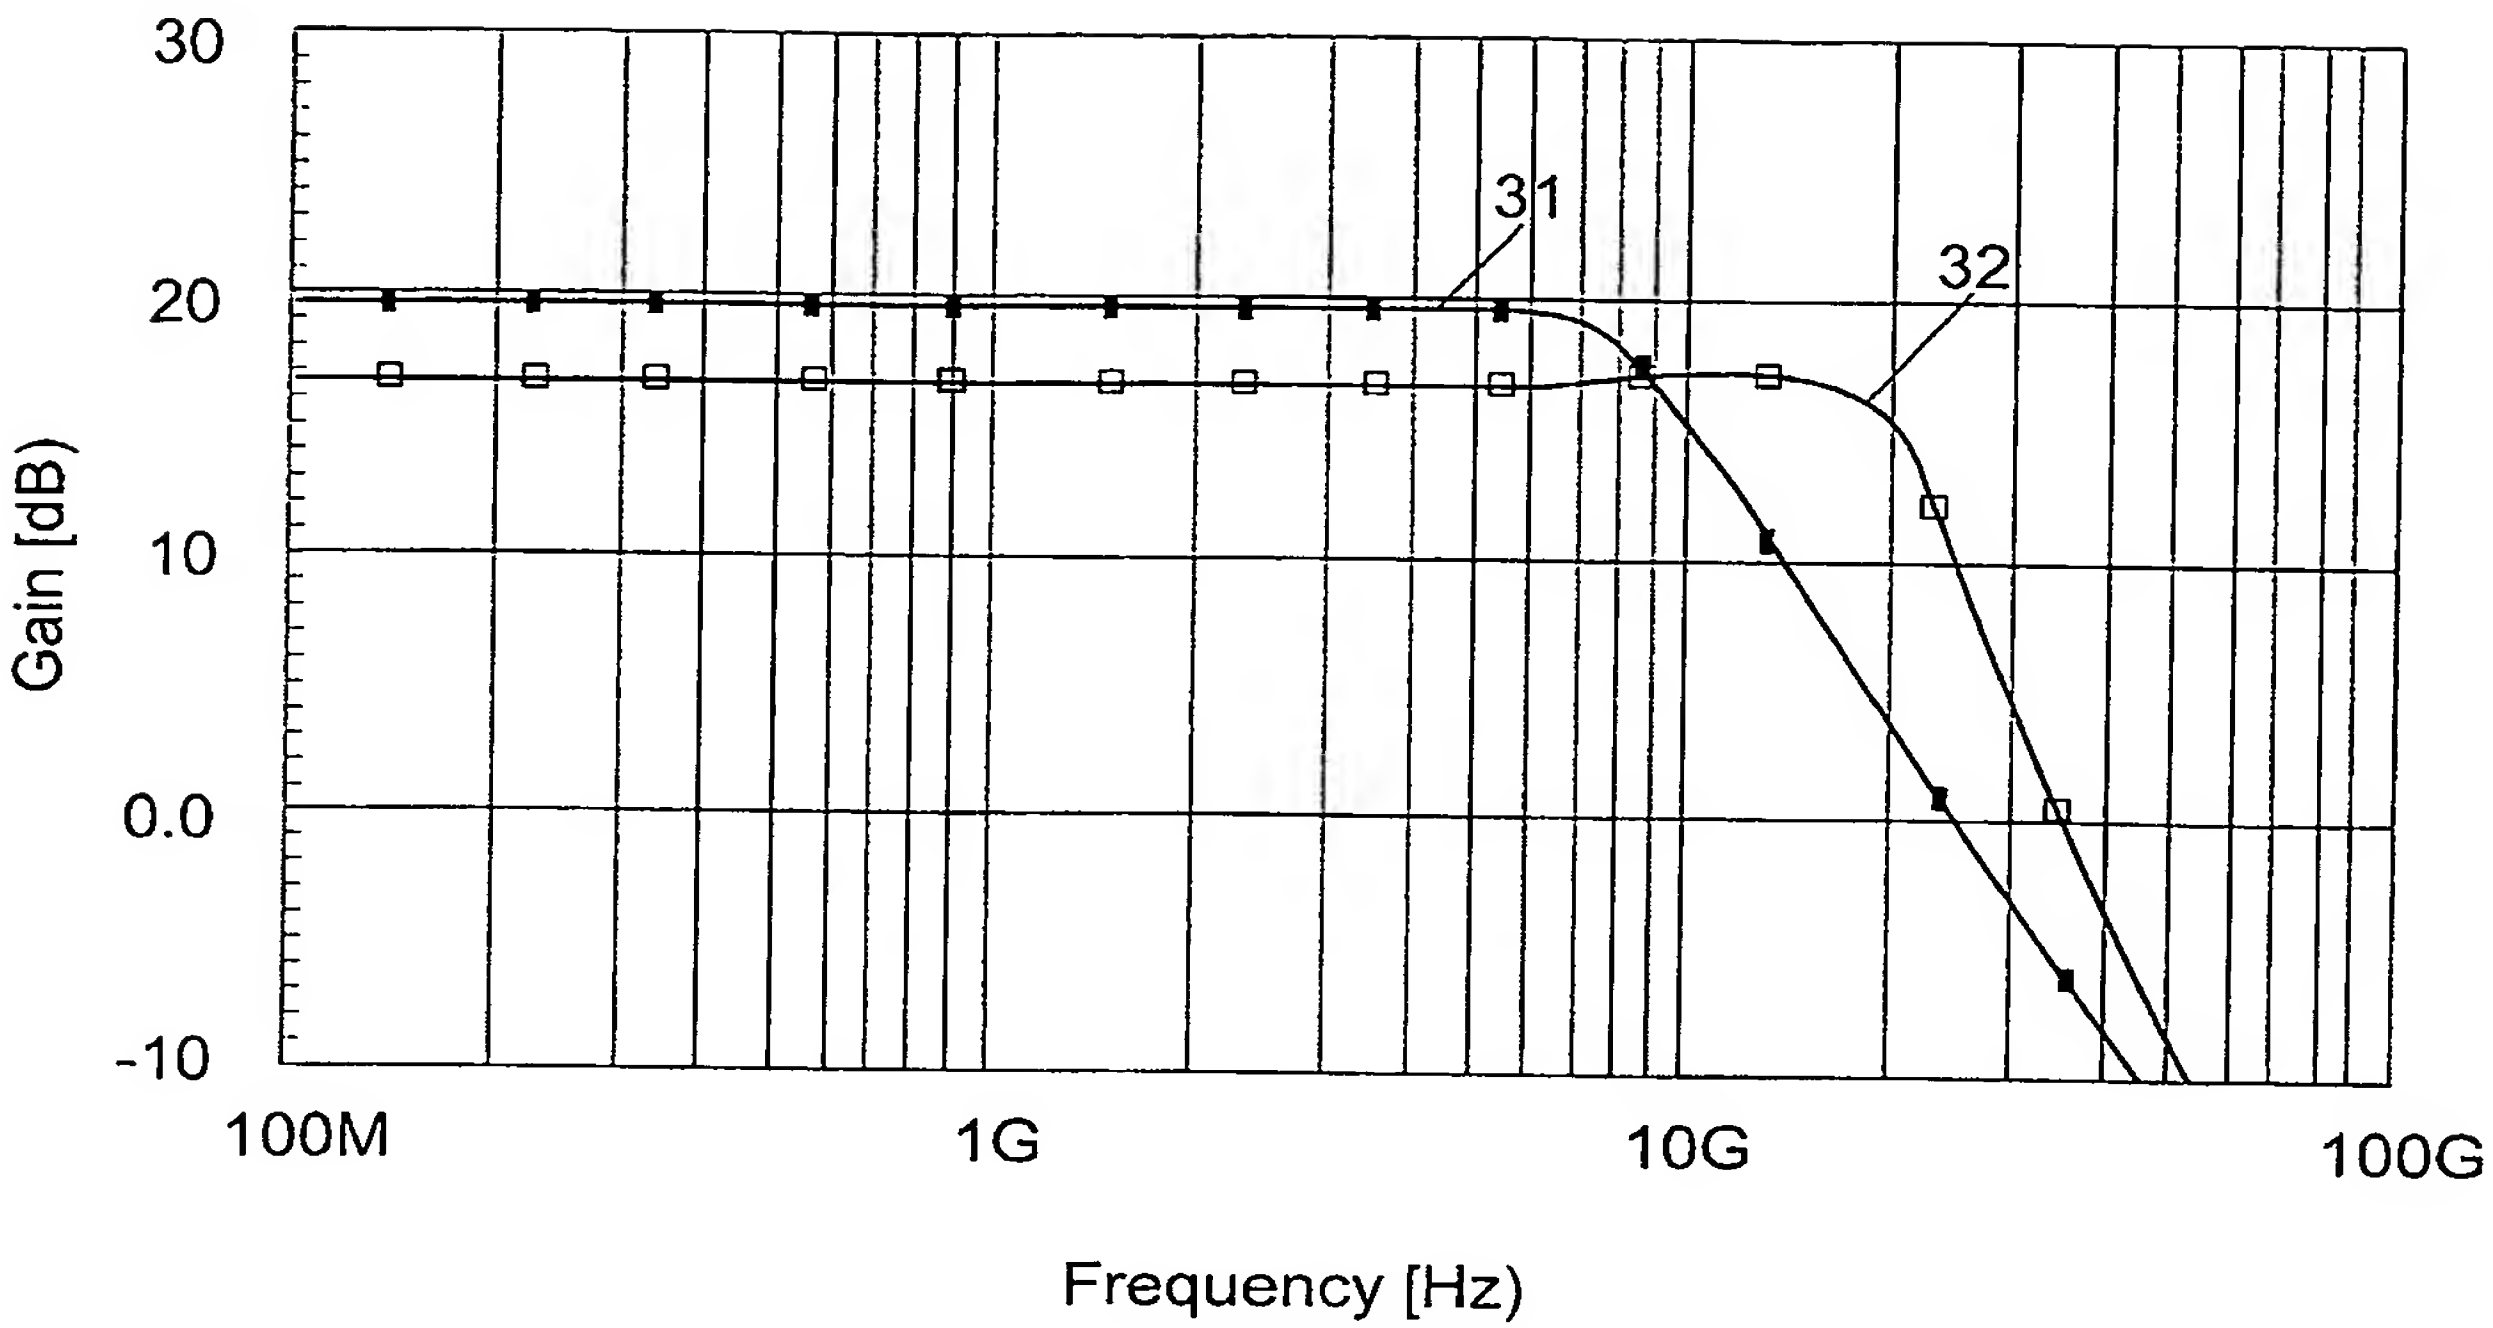


FIG. 3